


NETGEAR®

Installation Guide



Connect with Innovation™

Powerline 200 Mini (2-pack) XAVB1301


Package Contents




Powerline
200
Mini Adapters




Ethernet cables



Room 1

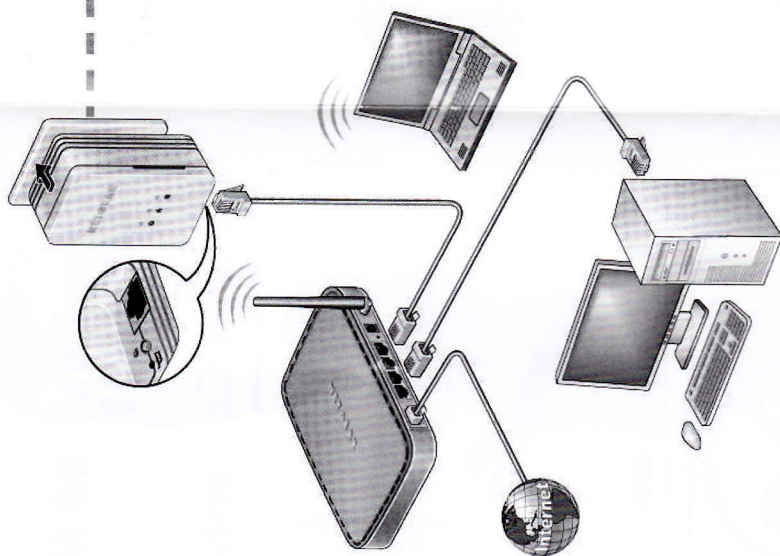

Room 2

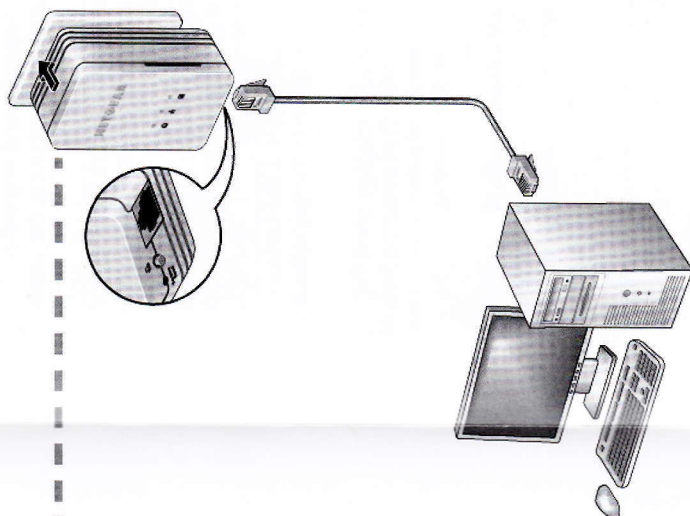

Compatible Powerline and HomePlug AV certified devices include the NETGEAR XAV101, XAV1004, XAV2001, XAV2501, and XAVN2001. For a complete list of AV certified devices, go to http://www.homeplug.org/certified_products

Safety Information

- AC input: 100-240V~, 60m A (Max).
- Operating temperature: 0C~40C.
- The socket-outlet shall be installed near the equipment and shall be easily accessible.

Technical Support

Thank you for selecting NETGEAR products.

After installing your device, locate the serial number on the label of your product and use it to register your product at <http://www.NETGEAR.com/register>. Registration is required before you can use our telephone support service. Registration via our website is strongly recommended.

To access the XAV1301 Powerline utility, go to <http://support.netgear.com>, enter your Powerline model number, and click the Powerline utility link.

To register your product, get the latest product updates, or get support online, visit us at <http://support.netgear.com>.

Phone (US & Canada only): 1-888-NETGEAR


Phone (Other Countries):



See http://support.netgear.com/app/answers/detail/a_id/984.


GPL may be included with this product; go to <ftp://downloads.netgear.com/files/GPLnotice.pdf> to view the GPL license agreement.

For complete DoC, please visit the NETGEAR EU Declarations of Conformity website at: http://support.netgear.com/app/answers/detail/a_id/11621.

LED and Button Descriptions

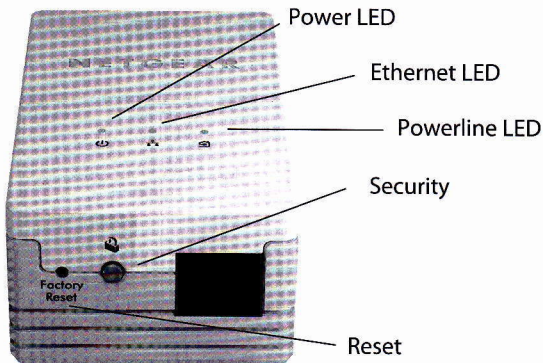

Item	Description
<p>Power LED</p> 	<ul style="list-style-type: none">• Solid green. The electrical power is on.• Solid amber. The adapter is in power saving mode.• Blinking green. The adapter is in the process of setting up security.• Off. There is no electrical power.
<p>Ethernet LED</p> 	<ul style="list-style-type: none">• Solid. The Ethernet port is linked.• Off. There is no Ethernet connection.

Item	Description		
Powerline LED 	<ul style="list-style-type: none"> • Solid. The adapter is connected to a Powerline network. • Off. The adapter has not found any other compatible Powerline devices using the same encryption key. 		
	The Pick A Plug feature lets you pick the electrical outlet with the strongest link rate, indicated by the color displayed by the LED:		
	Green: Link rate > 80 Mbps (Best)	Amber: Link rate > 50 and < 80 Mbps (Better)	Red: Link rate < 50 Mbps (Good)
Factory Reset	Press the Reset button for 1 second, then release it to return the Powerline adapter to its factory default settings.		
Security Button	After you plug in your new AV adapter, press the Security button for 2 seconds, then press the Security button on one of the other AV adapters in your existing network for 2 seconds. Both buttons must be pressed within 2 minutes. To power off your AV adapter , press and hold the Security button for 10 seconds or more, then release. Pressing the Security button again powers the unit back on.		

Warning: Do not press the **Security** button on the Powerline adapter until installation is complete and the adapters are communicating with each other (indicated by the blinking Powerline LED). Pressing this button too soon can temporarily disable Powerline communication. If this should occur, use the **Factory Reset** button to return the Powerline adapter to its factory default settings.

Troubleshooting Tips

Power LED is off	Make sure that power is supplied to the electrical outlet, and that the Powerline devices are not plugged into an extension cord, power strip, or surge protector.
Power LED is amber	Press the Security button and the Powerline adapter returns to normal mode.
Powerline LED is off	<ul style="list-style-type: none">• If you have set network security, make sure that all Power line devices are using the same encryption key; see the online <i>User Manual</i> for details.• Press the Reset button on each device for 1 second to return the Powerline adapter to its factory default settings.
Powerline LED is amber or red	Move the Powerline device to a closer location.
Ethernet LED is off	<ul style="list-style-type: none">• Make sure that the Ethernet cables are working and securely plugged into the devices.• Press the Reset button on each device for 1 second to return the Powerline adapter to its factory default settings.

For indoor use only in EU countries and Switzerland.



This symbol was placed in accordance with the European Union Directive 2002/96 on the Waste Electrical and Electronic Equipment (the WEEE Directive). If disposed of within the European Union, this product should be treated and recycled in accordance with the laws of your jurisdiction implementing the WEEE Directive.

NETGEAR, the NETGEAR logo, and Connect with Innovation are trademarks and/or registered trademarks of NETGEAR, Inc. in the United States and/or other countries. Information is subject to change without notice. Other brand and product names are trademarks or registered trademarks of their respective holders. ©2012 by NETGEAR, Inc. All rights reserved.



201-14841-01



May 2012