

MR BT V5.0 | TWS


TWS WIRELESS MUSIC HEADSET
V5.0+EDR

MANUAL



Part 1: Bluetooth headset

Product profile:

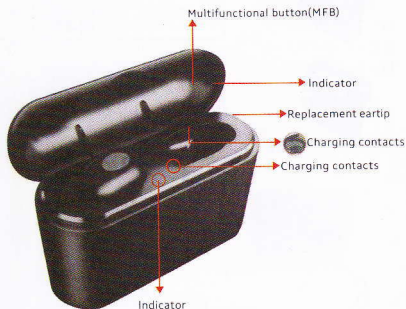

1. Switch (Bluetooth headset / turn off)



Power on:

Long press the multi-function button about 3 seconds and the LED flashing in blue, it shows the earphone is power on. Long press the multi-function button about 3 seconds and the LED flashing in red and blue alternately, that is the pairing status.



Power off:

Long press the multi-function button about 5 seconds and the LED flashing in red then off, it shows the earphone is power off.

2、Headset and charging case (LED light status)



Charging Status:LED light in red;

Get full power: After the charging is completed, the lights will be automatically extinguishing.

status of discharge:LED light in red

Charging Status:LED light flashing red; after get full power, LED Light in blue.

Charging method:

Using the USB cable to attach the adapter and the charging case, then plug the adapter into the power connector

3、Answer / Hang up / Reject



Answering/hanging up the call:

Short press the multi-function button 1 time

Refusing the call:

Quick press the multi-function button 2 times



Play/Pause:

Short press the multi-function button 1 time

Previous song:

Quick press the multi-function button 3 times

Next track:

Quick press the multi-function button 2 times

3. Single Earbud Pairing Method (single mode)




Long press about 3 seconds

First method: Remove either of earbud from the charging case, the earbud will automatically turn on and light blue, then flashing in red and blue and that is the pairing status. Select "MR Bluetooth TWS" on your list, there would be reminding voice saying "connected".


Second method: Long press the multi-function button about 3 seconds and the LED will flashing in red and blue alternately, that is the pairing status. Select "MR Bluetooth TWS" on your list, there would be reminding voice saying "connected".

4、TWS Pairing Method (TWS Mode)

- (1). Long press the MFB button for two earphones for about 3 seconds, then the earphone indicator light flashes blue and the earphone will be released Automatic pairing. When the pairing is successful, one headphone indicator is off and the other headphone indicator is off Turns red and blue flashing. This status indicates a successful pairing.



- (2). Please turn on the "Bluetooth" on your cellphone and choose "MR Bluetooth TWS" on your list, at this time you will hear a voice "Connected"

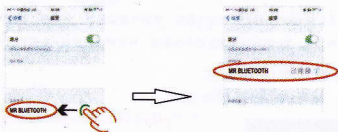

- (3). When the two machines are put into the charging bin, it will automatically shut down after the charging state is activated: at this time, the headset is picked up from the charging bin.

Long press the MFB button for 3 seconds to turn on the machine, and automatically form a team to connect to the bluetooth device.

5、 Manual Switch(Turn on/ off)



Power on:

Long press the multi-function button about 3 seconds and the LED flashing in blue, it shows the earphone is power on.




Power off:

Long press the multi-function button about 5 seconds and the LED flashing in red then off, it shows the earphone is power off.

2、 To recharge other equipment (such as a cell phone)

The third part: packaging and accessories



The Third Part : Parameters

1、 Earphone Parameters

- ◆ Wireless Version: V5.0+EDR
- ◆ Impedance: $\Phi 8\text{MM } 32\Omega$
- ◆ Mic Sensitivity: -42Db
- ◆ Wireless Frequency: 2.4GHZ
- ◆ Battery Capacity: 50mAh
- ◆ Working Temperature: -10-50°C
- ◆ Charging Voltage: DC5V
- ◆ Transmission Distance: 10M
- ◆ Playing Time: about 4 hours
- ◆ Charging Time: about 1 hour
- ◆ Standby Time: 120 hours
- ◆ Weight: 3g

2、 Charging Case Parameters

- ◆ Input(Output) voltage: 5V(TYP)
- ◆ Input current: 5V 1A(TYP)
- ◆ Output current: 5V 1A
- ◆ Weight: 35g

The charging case supports to charging your phone when your phone is out of power



warnings:

- Please do not violently treat this product, also don't squeeze with heavy objects, keep it away from high temperature and high humidity environment.
- Keep it away from WIFI and routers and other high-frequency transmitting devices, this will affect the signal reception of the unit and cause the sound to be broken and disconnected.
- Please use this product in the effective environment (12 meters), and there should be no physical blocking between the Bluetooth device and the headset.(such as a wall etc).
- Please use qualified charger to charge the charging case.
- This product can be connected to any enabled Bluetooth device.